


Microprocessor based Redox controller for panel rail mounting with two programmable outputs.

FEATURES

- Backlight LCD display
- Two on/off outputs
- Programmable delay at startup for probe polarization
- Programmable 0÷20mA output
- Stand-by for no flow interlock
- Easy user interface with navi-keys system
- Password protected settings
- Full scale accuracy: 1%

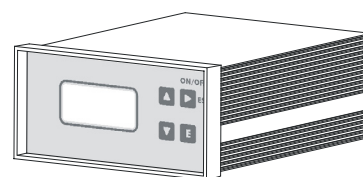

CONFIGURATION CODE

Model JRHDIG 0 B 00 G 4 3 5 S 00

ELECTRICAL

SIGNAL INPUT

With block connection

ON/OFF OUTPUT

Free voltage contact

POWER SUPPLY

24, 115, 230 VAC; 50/60 Hz

CURRENT OUTPUT

Programmable 0/4÷20mA (max 350 Ohm) galvanic isolated


POWER CONSUMPTION

Average 4 W

INPUT

1 Flow sensor

DIMENSION

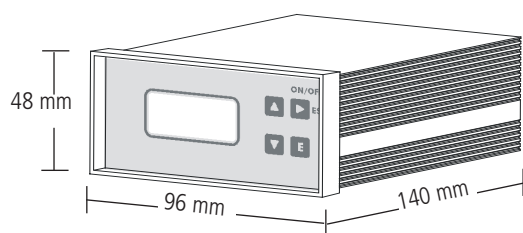

Mounting hole size: 91x45 mm

ENCLOSURE


IP40 enclosure

ENVIRONMENT

0°C ÷ 50°C (32°F ÷ 122°F)

0÷95% (non condensing) relative humidity

"EASY-NAV" MENU

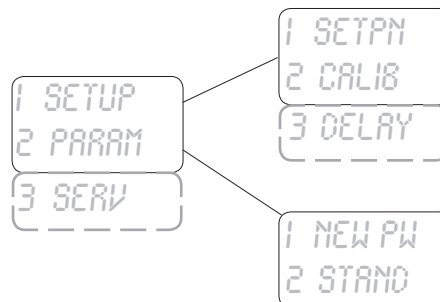

ORP (REDOX) ELECTRODES

For more information refer to ORP probe datasheet.

PROBE	INSTRUMENT RANGE	RESOLUTION
ORP	from 0 to +1000 mV	1