Probe-holders "NPED"

Data Sheet

FEATURES

- Off-line probe holders (min flow 20l/h, max flow 80l/h)
- Simple installation
- Bracket for wall mounting
- All cups available transparent or black against sun light

NPED
Off-line probe holders

- SAN transparent or black body
- On request it is possible to have one or two additional holes (1/2" or 3/4")



model	electrodes connection	flow sensor	fitting	temperature (°C)	pressure (bar)
NPED-E	Eolum	-	6x8	50	5
NPED-E2	Etorb2	-	6x8	40	5
NPED-E2-EV	Etorb2+valv. mot. 3/4"	-	6x8	40	5
NPED-IND	Ecdindpt	-	6x8	40	5
NPED-IND PP	Ecdindpt	-	6x8	60	5
NPED-INDS	Ecdindspt	-	6x8	40	5
NPED1	2 (ø 12-pg13,5)	-	6x8	40	5
NPED2	2 (epoxy ø 12)	-	6x8	40	5
NPED5	2 (epoxy ø 12) 1 (1/2" thread)	-	6x8	40	5
NPED4	2 (epoxy ø 12)	N.o.	6x8	40	5
NPED4-1/2	2 (epoxy ø 12) 1 (1/2")	N.o.	6x8	40	5
NPED4/2F	2 (epoxy ø 12)	2 wires for N.C. contact instrument	6x8	40	5

ACCESSORIES

description
Cleaning Kit for NPED-E2-EV

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com


Specifications subject to change without notice | R2025

emec SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0

PEF
Off-line probe holders

- Off-line probe holders for closed amperometric cells
- With flow level control, proximity switch and capacity stabilizer (0,4 / 3 bar)
- PMMA body and PVDF fittings
- Off-line probe holders for membrane probes (SCL3, SCL2, SCL8, SCL9, SCL10, SCL11, SBR, SCT) have got an anti-vacuum device

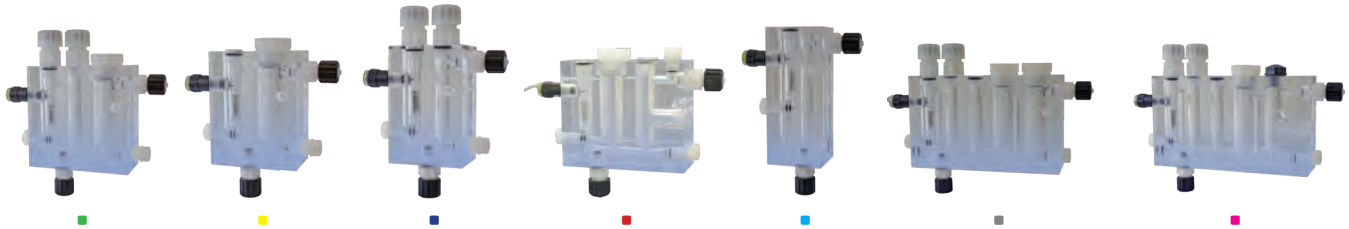

model	electrodes connection	fitting	temperature (°C)	pressure (bar)	hose
PEF1R	1 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
PEF1ER	1 x scl; 1 x temp.	6x8 PVDF	50	5	4 m pe
PEF1ER/K	1 x scl; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
PEF1R/K	1 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
PEF2	2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
PEF2/K	2 x ø 12; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
PEF3	2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	50	5	4 m pe
PEF5R	1 x scl; 2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	50	5	4 m pe
PEF5R/K	1 x scl; 2 x ø 12 - pg13,5; 1 x temp.	6x8 PVDF	80	5	4 m PVDF
PEF22R	2 x scl; 2 x ø 12; 1 x temp.	6x8 PVDF	50	5	4 m pe
PEF23R	1 x scl; 2 x ø 12; 1 x temp.; 1 x cd (3/4")	6x8 PVDF	50	5	4 m pe
PEF24R	1 x efl	6x8 PVDF	50	5	4 m pe
PEF26R	1 x scl; 1 x efl	6x8 PVDF	50	5	4 m pe
PEF27R	1 x scl; 1 x cd (3/4")	6x8 PVDF	50	5	4 m pe

PROXIMITY SENSOR

description
Inductive proximity sensor SEPR

LED STRIP

description
LED strip

Via Donatori di Sangue, 1 - 02100 Rieti (Italy)
+39 074622841 | emecpumps.com

Specifications subject to change without notice | R2025

emec SIMPLE AS WATER

IQNET CERTIFIED MANAGEMENT SYSTEM
qualityaustria SYSTEM CERTIFIED
ISO 9001:2015 No.07728/0
ISO 14001:2015 No.00997/0
ISO 45001:2018 No.01121/0